
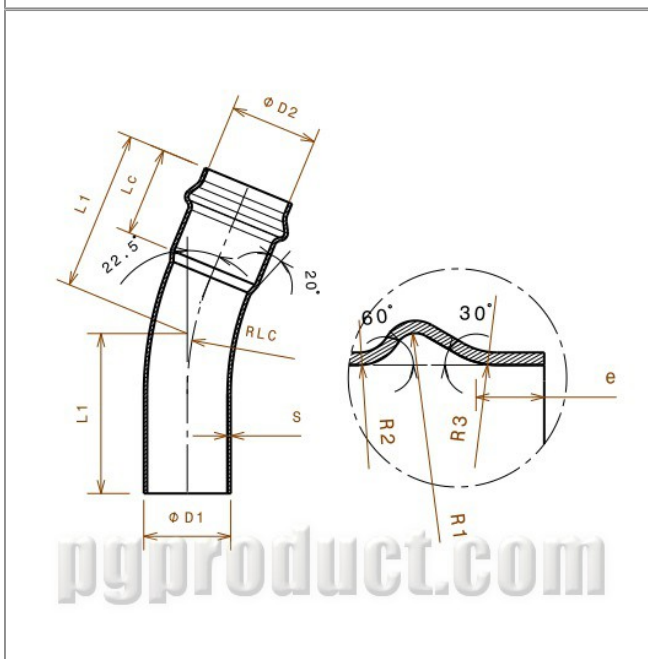
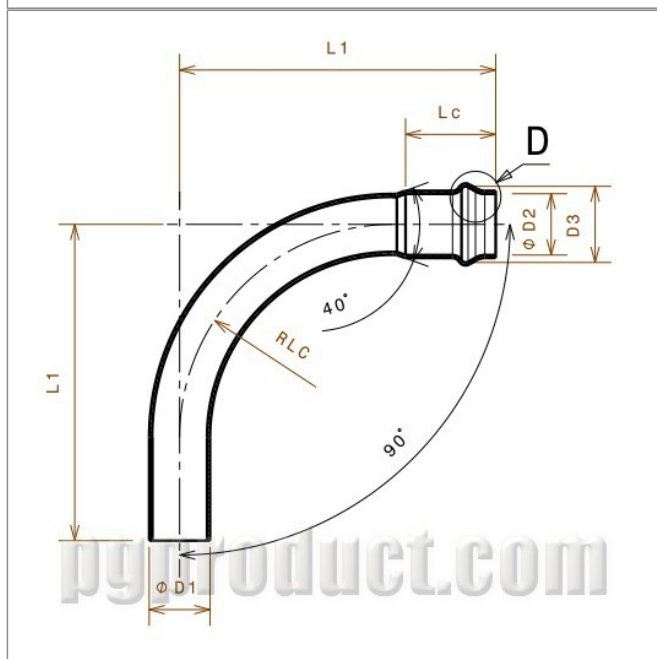


Bend pipes , Dark Grey , Single Socket , Push Fit

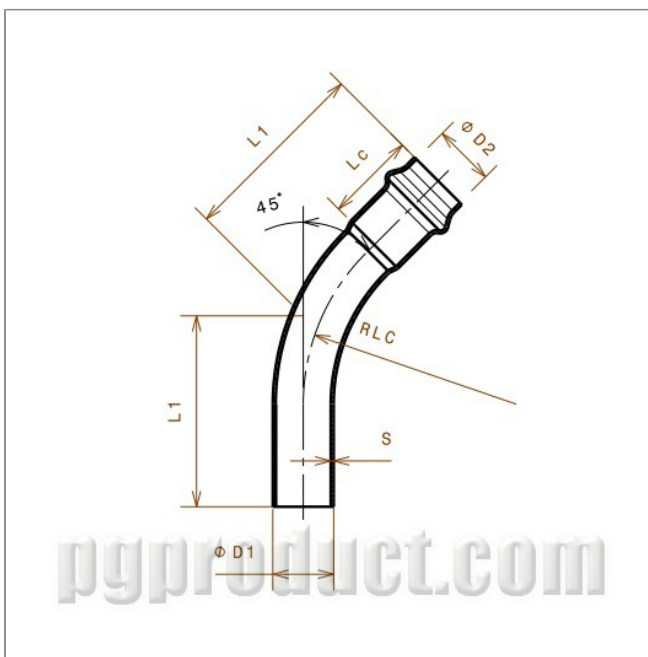

Standard :ISO 1452-3

Code No .	Thickness (mm)	Nominal Outside Diameter (mm)	Nominal pressure (Bar)	angle (Degree)	RLC	D2	D3	e	LC	L1	R1	R2	R3
PG 44004 P	3.6	75	10	45	262.5	75.6	93.9	19.6	111.2	235	5.9	13	23

Code No .	Thickness (mm)	Nominal Outside Diameter (mm)	Nominal pressure (Bar)	angle (Degree)	RLC	D2	D3	e	LC	L1	R1	R2	R3
PG 44014 P	3.6	75	10	90	262.5	75.6	93.9	19.6	111.2	390	5.9	13	23
PG 44009 P	3.6	75	10	90	796	75.6	93.9	19.6	111.2	920	5.9	13	23
PG 44024 P	4.3	90	10	45	315	90.7	110.7	21	116.1	260	6.5	13	23
PG 44029 P	4.3	90	10	90	630	90.7	110.7	21	116.1	885	6.5	13	23
PG 44034 P	4.3	90	10	90	315	90.7	110.7	21	116.1	450	6.5	13	23
PG 44044 P	5.3	110	12.5	45	385	110.8	132.5	22	122.9	300	7	13	23
PG 44049 P	5.3	110	12.5	90	776	110.8	132.5	22	122.9	916.5	7	13	23
PG 44054 P	5.3	110	12.5	90	385	110.8	132.5	22	122.9	524	7	13	23
PG 44064 P	4.8	125	10	22.5	437.5	125.8	148.4	23.8	128.1	228	7	13	23
PG 44069 P	4.8	125	10	45	437.5	125.8	148.4	23.8	128.1	325	7	13	23
PG 44074 P	4.8	125	10	90	770	125.8	148.4	23.8	128.1	915	7	13	23
PG 44079 P	4.8	125	10	90	437.5	125.8	148.4	23.8	128.1	581	7	13	23

Code No .	Thickness (mm)	Nominal Outside Diameter (mm)	Nominal pressure (Bar)	angle (Degree)	RLC	D2	D3	e	LC	L1	R1	R2	R3
PG 44109 P	6.2	160	10	45	560	161	186	28	140.2	377	8.1	17	30
PG 44114 P	6.2	160	10	90	720	161	186	28	140.2	904.5	8.1	17	30
PG 44119 P	6.2	160	10	90	560	161	186	28	140.2	720	8.1	17	30

PG